


ECX SPEED 22 L Ø22 mm, brushless, BLDC motor

High Power

Key Data: 120/153 W, 29.3 mNm, 60 000 rpm



ECX SPEED

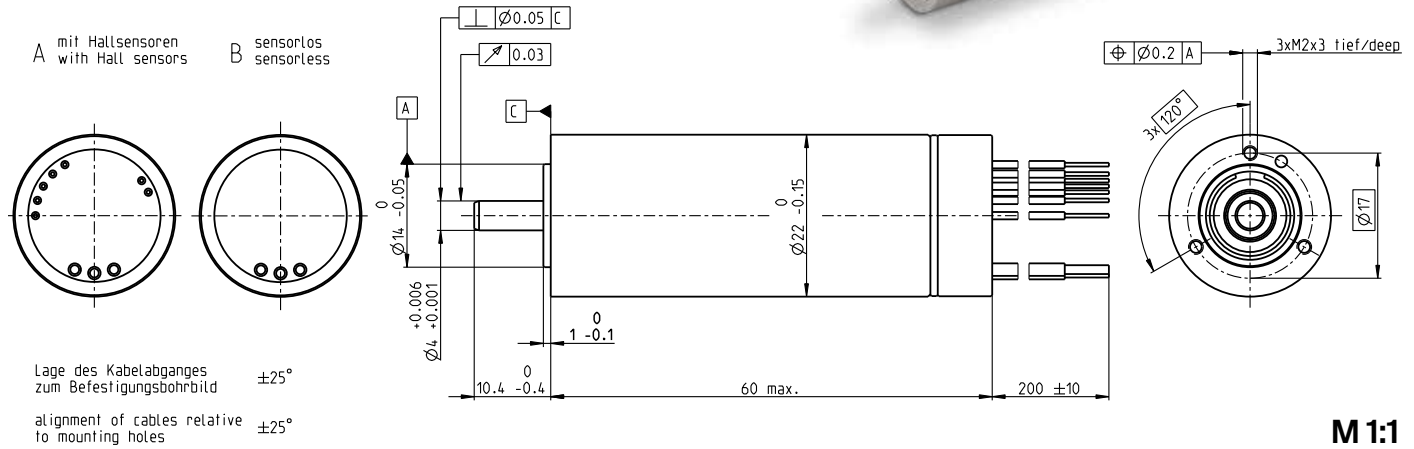

M 1:1


Motor Data

1_	Nominal voltage	V	24	36	48
2_	No load speed	rpm	49400	51400	52400
3_	No load current	mA	432	307	238
4_	Nominal speed	rpm	47800	49900	50900
5_	Nominal torque (max. continuous torque)	mNm	29.1	29.3	27.4
6_	Nominal current (max. continuous current)	A	6.67	4.67	3.36
7_	Stall torque	mNm	1080	1290	1230
8_	Stall current	A	233	193	141
9_	Max. efficiency	%	91.7	92.3	92
10_	Terminal resistance	Ω	0.103	0.187	0.341
11_	Terminal inductance	mH	0.009	0.0188	0.0321
12_	Torque constant	mNm/A	4.63	6.68	8.74
13_	Speed constant	rpm/V	2060	1430	1090
14_	Speed/torque gradient	rpm/mNm	45.9	40	42.6
15_	Mechanical time constant	ms	1.9	1.65	1.76
16_	Rotor inertia	gcm ²	3.94	3.94	3.94

Thermal data

17_	Thermal resistance housing-ambient	K/W	12.2
18_	Thermal resistance winding-housing	K/W	0.841
19_	Thermal time constant winding	s	2.77
20_	Thermal time constant motor	s	619
21_	Ambient temperature	°C	-20...+100
22_	Max. winding temperature	°C	155

Operating Range

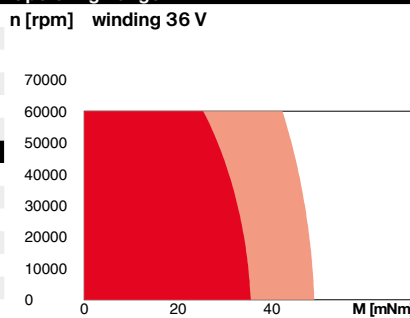

Mechanical data ball bearings

23_	Max. speed	rpm	60 000
24_	Axial play	mm	0...0.24
	Preload	N	4
	Direction of force		pull
25_	Radial play	preloaded	
26_	Max. axial load (dynamic)	N	4
27_	Max. force for press fits (static) (static, shaft supported)	N	110 6000
28_	Max. radial load [mm from flange]	N	16 [5]

Other specifications

29_	Number of pole pairs	1
30_	Number of phases	3
31_	Weight of motor	g 140
32_	Typical noise level [rpm]	dBA 54 [50 000]

Connection A and B, motor (Cable AWG 18)

red	Motor winding 1
black	Motor winding 2
white	Motor winding 3

Connection A, sensors (Cable AWG 26)

orange	V _{Hall} 3...24 VDC
blue	GND
yellow	Hall sensor 1
brown	Hall sensor 2
grey	Hall sensor 3

Wiring diagram for Hall sensors see page 57. In combination with the ENX EASY INT, the orange (V_{CC}) and blue (GND) connections are not used. Hall signals are then generated by an ENX EASY-INT sensor (no pull-up resistor required; output signals: CMOS compatible push-pull stage).

Connection NTC (Cable AWG 26)

purple	NTC
purple	NTC

Resistance 25°C: 10 kOhm ±1%, beta (25-85°C): 3490 K

maxon Modular System

maxon gear	Stages [opt.]
349_GPX 22 A/C	1-2 [3-4]
350_GPX 22 LN/LZ	1-2 [3-4]
351_GPX 22 HP	2-3 [4]
352_GPX 22 UP	1-4
353_GPX 22 SPEED	1-2
354_GPX 26 A/C	3
355_GPX 26 LN/LZ	3
356_GPX 26 HP	4

maxon sensor

for motor type A:
456_ENX 22 EASY INT
for motor type B:
456_ENX 22 EASY INT Abs.

maxon motor control

501_ESCON Module 50/4 EC-S
501_ESCON Module 50/5
502_ESCON Module 50/8 HE
503_ESCON 50/5
503_ESCON 70/10
505_DEC Module 50/5
510_EPOS4 Mod./Comp. 50/5
511_EPOS4 Mod./Comp. 50/8
515_EPOS4 70/15
515_EPOS4 50/5
516_EPOS4 Disk 60/8
517_EPOS4 Disk 60/12
520_EPOS2 P 24/5

Configuration

Flange front: thread holes/center thread
Flange back: plastic ring/external thread/with opening
Shaft front: length/diameter
Shaft rear: length
Electric connection: cable length/pin connection/connector
Temperature sensor: NTC-Thermistor (only for motor type A and only when not combined with an encoder).
Appropriate connectors and connecting cables are available for the configuration of the pin connection together with the external thread: see catalog, Accessories section.