


EC-4pole 32 Ø32 mm, brushless, 220 watt

Heavy Duty – for applications in air

EC-4pole

A mit Hallensoren
with Hall sensors

B sensorlos
sensorless

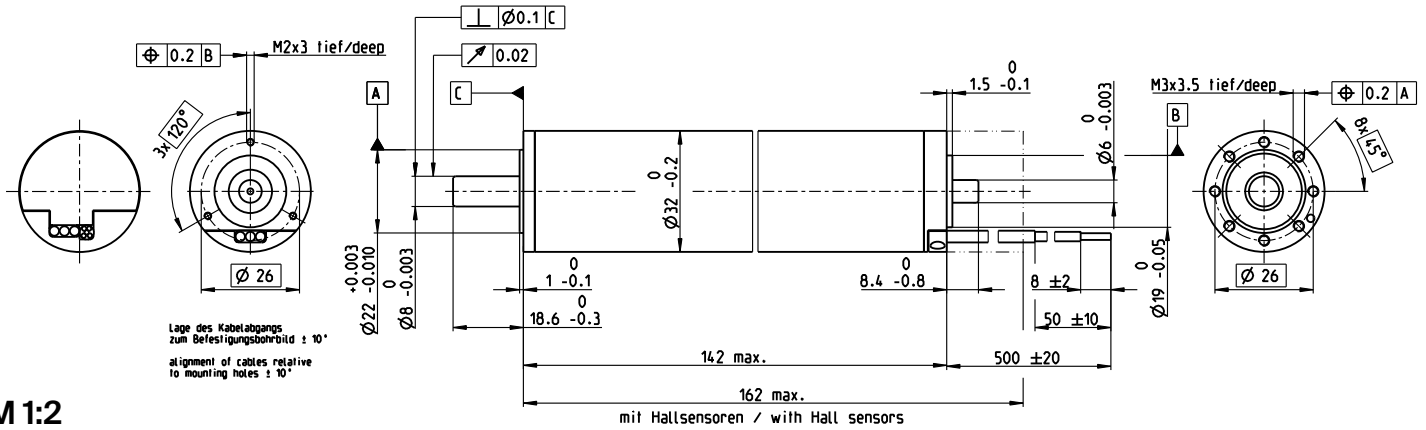

M 1:2

- Stock program
- Standard program
- Special program (on request)

Part Numbers	
A with Hall sensors	397798
B sensorless	393879

Motor Data (provisional)	25	100	150	200	
Values at nominal voltage and ambient temperature °C					
1 Nominal voltage	V	48	48	48	48
2 No load speed	rpm	6470	6650	6770	6890
3 No load current	mA	149	113	109	107
4 Nominal speed ¹⁾	rpm	5710	5870	6080	6470
5 Nominal torque (max. continuous torque) ¹⁾	mNm	334	261	196	104
6 Nominal current (max. continuous current)	A	4.87	3.85	2.98	1.67
7 Stall torque	mNm	3350	2520	2150	1860
8 Stall current	A	47.5	36.7	31.9	28.1
9 Max. efficiency	%	89	89	89	88
Characteristics					
10 Terminal resistance phase to phase	Ω	1.01	1.31	1.51	1.71
11 Terminal inductance phase to phase	mH	0.298	0.298	0.298	0.298
12 Torque constant	mNm/A	70.5	68.7	67.4	66.2
13 Speed constant	rpm/V	135	139	142	144
14 Speed / torque gradient	rpm/mNm	1.94	2.65	3.16	3.71
15 Mechanical time constant	ms	2.6	3.55	4.24	4.98
16 Rotor inertia	gcm ²	128	128	128	128

¹⁾ Values for operation in thermal equilibrium.

Specifications	Operating Range	Comments
Thermal data		
17 Thermal resistance housing-ambient	4 K/W	<div style="display: flex; align-items: flex-start;"> <div style="margin-right: 10px;"> <p>TA = 25°C Continuous operation</p> <p>TA = 100°C In observation of above listed thermal resistance (lines 17 and 18) the maximum permissible winding temperature will be reached during continuous operation at 25°C ambient. = Thermal limit.</p> <p>TA = 150°C</p> <p>TA = 200°C</p> </div> <div style="margin-right: 10px;"> <p>Short term operation</p> <p>The motor may be briefly overloaded (recurring).</p> </div> <div> <p>Assigned power rating</p> </div> </div>
18 Thermal resistance winding-housing	0.53 K/W	
19 Thermal time constant winding	17 s	
20 Thermal time constant motor	1720 s	
21 Ambient temperature	-55...+200°C	
22 Max. winding temperature	+240°C	
Mechanical data (preloaded ball bearings)		
23 Max. speed	12 000 rpm	
24 Axial play at axial load < 20 N	0 mm	
24 Axial play at axial load > 20 N	0.14 mm	
25 Radial play	preloaded	
26 Max. axial load (dynamic)	16 N	
27 Max. force for press fits (static) (static, shaft supported)	80 N	
27 Max. force for press fits (static) (static, shaft supported)	3000 N	
28 Max. radial load, 5 mm from flange	75 N	

Application	Notice
General 2 – extreme temperature applications 3 – vibration tested (according to MIL-STD810F/Jan2000 Fig. 514.5C-10) – ultra-high vacuum applications (modifications necessary). low outgassing, can be baked out at 240°C Aerospace – gas turbine starter/generators for aircraft engines – regulation of combustion engines Oil & Gas Industry – oil, gas and geothermal wells Robotics – robotic exploration vehicles Industry – pumps and valves for liquid metal cooling systems/turbine fuel and steam control – valve adjustment for gas and steam power plants	This motor contains leaded solder. It therefore does not fulfill the requirements for the permitted maximum concentration of hazardous substances in accordance with the EC directive 2011/65/EC (RoHS) for all applications. The motor may therefore only be used for devices that are not subject to this directive.