
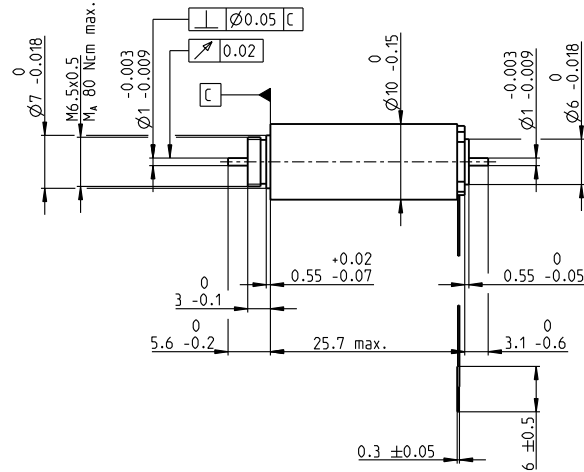


# EC 10 Ø10 mm, brushless, 8 watt

EC

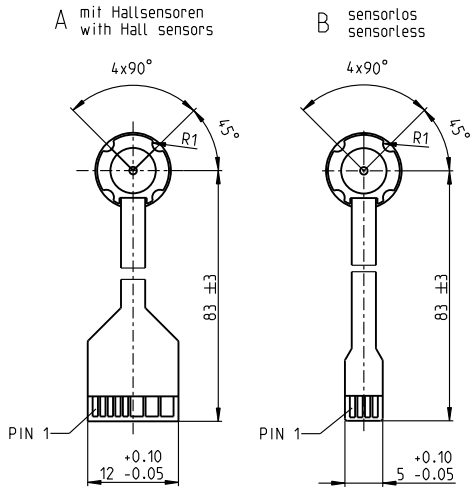

M 1:1

- Stock program
- Standard program
- Special program (on request)

		Part Numbers			
A with Hall sensors		315170	315171	315172	315173
B sensorless		315174	315175	315176	315177

Motor Data					
Values at nominal voltage					
1 Nominal voltage	V	6	9	12	18
2 No load speed	rpm	49200	52500	53200	57100
3 No load current	mA	160	118	90.4	67.3
4 Nominal speed	rpm	41700	45600	46600	50900
5 Nominal torque (max. continuous torque)	mNm	1.74	1.63	1.62	1.61
6 Nominal current (max. continuous current)	A	1.66	1.11	0.843	0.6
7 Stall torque	mNm	12	13	13.7	15.6
8 Stall current	A	10.4	8.05	6.46	5.27
9 Max. efficiency	%	77	78	78	79
Characteristics					
10 Terminal resistance phase to phase	Ω	0.575	1.12	1.86	3.42
11 Terminal inductance phase to phase	mH	0.00998	0.0198	0.0342	0.0671
12 Torque constant	mNm/A	1.15	1.61	2.12	2.97
13 Speed constant	rpm/V	8340	5920	4500	3220
14 Speed/torque gradient	rpm/mNm	4180	4110	3940	3700
15 Mechanical time constant	ms	3.03	2.97	2.85	2.68
16 Rotor inertia	gcm <sup>2</sup>	0.0691	0.0691	0.0691	0.0691

Specifications	Operating Range	Comments
<b>Thermal data</b> 17 Thermal resistance housing-ambient 39.8 K/W 18 Thermal resistance winding-housing 5.1 K/W 19 Thermal time constant winding 1.51 s 20 Thermal time constant motor 2.21 s 21 Ambient temperature -40...+100°C 22 Max. winding temperature +125°C  <b>Mechanical data (preloaded ball bearings)</b> 23 Max. speed 65000 rpm 24 Axial play at axial load < 0.2 N 0 mm > 0.2 N max. 0.14 mm 25 Radial play preloaded 0.16 mm 26 Max. axial load (dynamic) 12 N 27 Max. force for press fits (static) (static, shaft supported) 250 N 28 Max. radial load, 5 mm from flange 2 N		<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: red; border: 1px solid black;"></span> <b>Continuous operation</b> In observation of above listed thermal resistance (lines 17 and 18) the maximum permissible winding temperature will be reached during continuous operation at 25°C ambient. = Thermal limit.</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: white; border: 1px solid black;"></span> <b>Short term operation</b> The motor may be briefly overloaded (recurring).</li> <li><b>Assigned power rating</b></li> </ul>

Other specifications  
 29 Number of pole pairs 1  
 30 Number of phases 3  
 31 Weight of motor 13 g

Values listed in the table are nominal.

Connection	with Hall sensors	sensorless
Pin 1	V <sub>Hall</sub> 4.5...24 VDC	Motor winding 1
Pin 2	Hall sensor 3	Motor winding 2
Pin 3	Hall sensor 1	Motor winding 3
Pin 4	Hall sensor 2	N.C.
Pin 5	GND	
Pin 6	Motor winding 3	
Pin 7	Motor winding 2	
Pin 8	Motor winding 1	
<b>Adapter</b>	<b>Part number</b>	<b>Part number</b>
see p. 529	220300	220310
<b>Connector</b>	<b>Part number</b>	<b>Part number</b>
TE	1-84953-1	84953-4
Molex	52207-1133	52207-0433

Pin for design with Hall sensors:  
 FPC, 11-pol, Pitch 1.0 mm, top contact style  
 Wiring diagram for Hall sensors see page 57

maxon Modular System  
 Planetary Gearhead  
 Ø10 mm  
 0.01 - 0.15 Nm  
 Page 371

**Recommended Electronics:**

Notes	Page 42
ESCON Module 24/2	500
ESCON 36/3 EC	501
ESCON Mod. 50/4 EC-S	501
DEC Module 24/2	505