


EC 22 Ø22 mm, brushless, 240 watt

Heavy Duty – for applications in oil

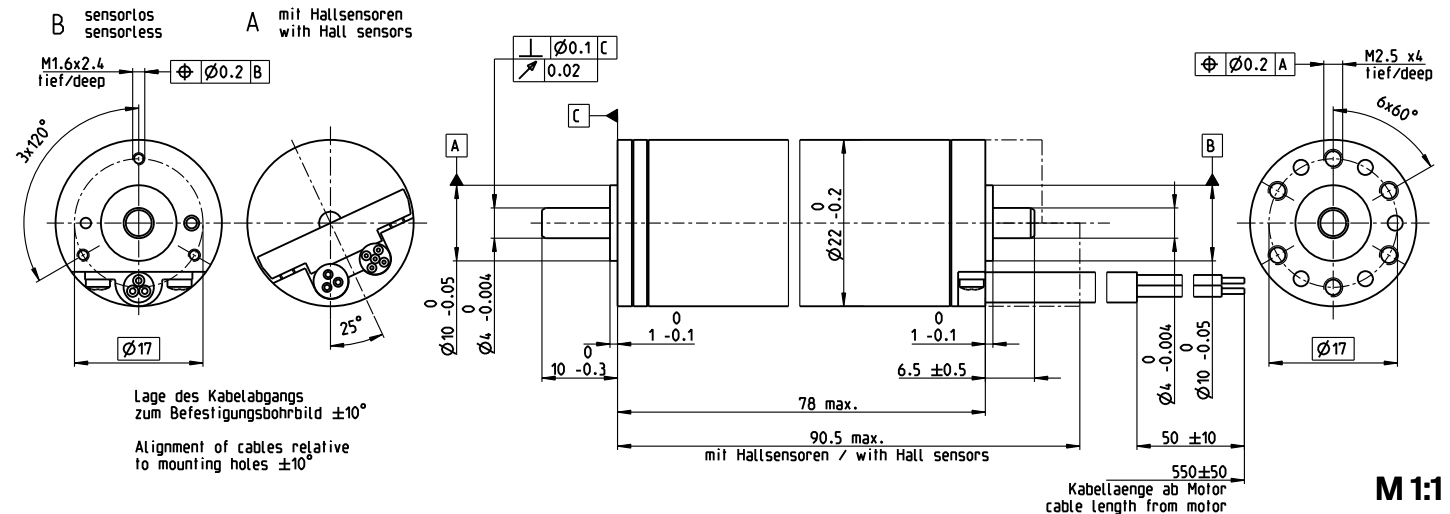

- Stock program
- Standard program
- Special program (on request)

Part Numbers	
A with Hall Sensors	426450
B sensorless	426451

Motor Data		25	100	150	200
Values at nominal voltage and ambient temperature °C					
1 Nominal voltage	V	48	48	48	48
2 No load speed	rpm	12900	13400	13600	13800
3 No load current	mA	384	177	183	188
4 Nominal speed ¹⁾	rpm	8410	8510	9130	10600
5 Nominal torque (max. continuous torque) ¹⁾	mNm	149	120	92.2	55.8
6 Nominal current (max. continuous current)	A	4.48	3.61	2.88	1.86
7 Stall torque	mNm	460	346	295	256
8 Stall current	A	13.4	10.3	8.98	7.93
9 Max. efficiency	%	71	77	75	73
Characteristics					
10 Terminal resistance phase to phase	Ω	3.59	4.64	5.35	6.05
11 Terminal inductance phase to phase	mH	0.626	0.626	0.626	0.626
12 Torque constant	mNm/A	34.4	33.5	32.9	32.3
13 Speed constant	rpm/V	278	285	290	296
14 Speed / torque gradient	rpm/mNm	29	39.5	47.2	55.4
15 Mechanical time constant	ms	2.31	3.16	3.77	4.43
16 Rotor inertia	gcm ²	763	763	763	763

¹⁾ Values in thermal steady state.

Specifications	Operating Range	Comments
Thermal data 17 Thermal resistance housing-ambient 0.793 K/W 18 Thermal resistance winding-housing 0.754 K/W 19 Thermal time constant winding 4.78 s 20 Thermal time constant motor 40.2 s 21 Ambient temperature -55...+200°C 22 Max. winding temperature +240°C	n [rpm] 	TA = 25°C TA = 100°C TA = 150°C TA = 200°C
Mechanical data (preloaded ball bearings) 23 Max. speed 20000 rpm 24 Axial play at axial load < 5 N 0 mm > 5 N max. 0.14 mm 25 Radial play preloaded 26 Max. axial load (dynamic) 8 N 27 Max. force for press fits (static) 98 N (static, shaft supported) 250 N 28 Max. radial load, 5 mm from flange 16 N		Continuous operation In observation of above listed thermal resistance (lines 17 and 18) the maximum permissible winding temperature will be reached during continuous operation at 25°C ambient. = Thermal limit.
Other specifications 29 Number of pole pairs 30 Number of phases 31 Weight of motor 210 g		Short term operation The motor may be briefly overloaded (recurring).

Application	Notice
General 1 – extreme temperature applications 3 – vibration tested according to MIL-STD810F/Jan2000 Fig. 514.5C-10 – operation in oil and high pressure (only minimal lubrication, therefore use under rated ambient conditions is not suggested)	This motor contains leaded solder. It therefore does not fulfill the requirements for the permitted maximum concentration of hazardous substances in accordance with the EC directive 2011/65/EC (RoHS) for all applications. The motor may therefore only be used for devices that are not subject to this directive.
Oil & Gas Industry – oil, gas and geothermal wells	

maxon modular system	Details on catalog page 42
Planetary Gearhead Ø22 mm 2.0 - 4.0 Nm Page 388	