


EC 32 flat $\varnothing 32$ mm, brushless, 15 watt

EC flat

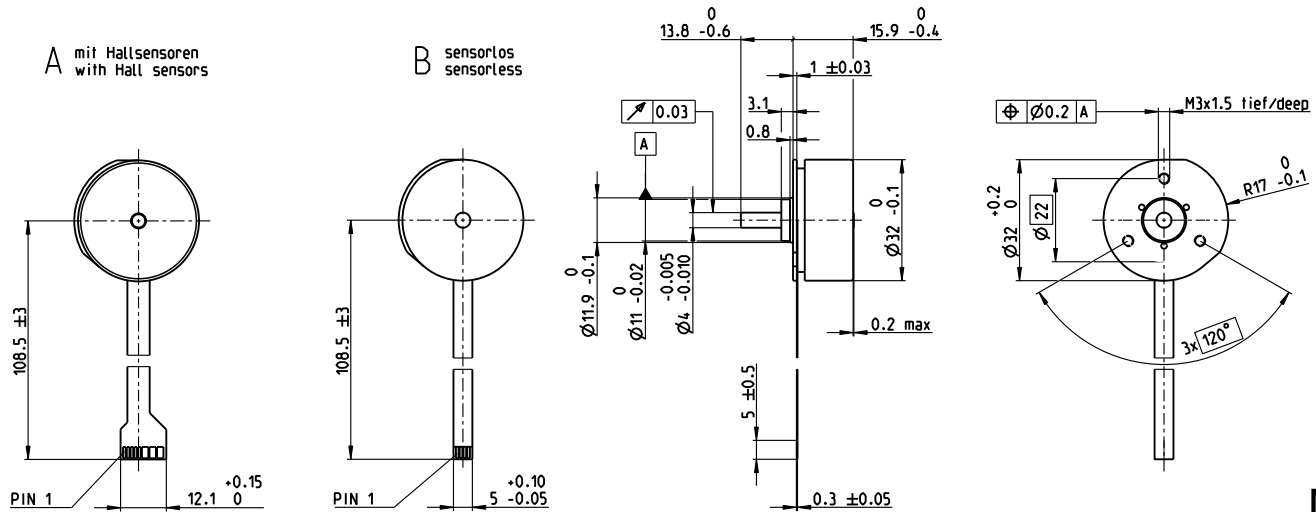

M 1:2

- Stock program
- Standard program
- Special program (on request)

		Part Numbers			
A with Hall sensors		339267	339268	267121	339269
B sensorless		339271	339272	226006	339273

Motor Data					
Values at nominal voltage					
1 Nominal voltage	V	9	12	24	48
2 No load speed	rpm	3720	4610	4530	4780
3 No load current	mA	74.7	75.7	36.9	19.9
4 Nominal speed	rpm	2060	2790	2760	2940
5 Nominal torque (max. continuous torque)	mNm	24.5	25	25.5	24.7
6 Nominal current (max. continuous current)	A	1.06	1	0.5	0.257
7 Stall torque ¹	mNm	68.3	82.3	85.3	83.9
8 Stall current	A	3.06	3.42	1.74	0.904
9 Max. efficiency	%	71	73	73	73
Characteristics					
10 Terminal resistance phase to phase	Ω	2.95	3.51	13.8	53.1
11 Terminal inductance phase to phase	mH	1.61	1.86	7.72	27.7
12 Torque constant	mNm/A	22.4	24.1	49	92.8
13 Speed constant	rpm/V	427	397	195	103
14 Speed/torque gradient	rpm/mNm	56.3	57.8	54.8	58.8
15 Mechanical time constant	ms	20.6	21.2	20.1	21.6
16 Rotor inertia	gcm ²	35	35	35	35

Specifications	Operating Range	Comments
Thermal data 17 Thermal resistance housing-ambient 10.8 K/W 18 Thermal resistance winding-housing 4.99 K/W 19 Thermal time constant winding 8.78 s 20 Thermal time constant motor 120 s 21 Ambient temperature -40...+100°C 22 Max. winding temperature +125°C Mechanical data (preloaded ball bearings) 23 Max. speed 10000 rpm 24 Axial play at axial load < 5.0 N 0 mm > 5.0 N typ. 0.6 mm 25 Radial play preloaded 4.8 N 26 Max. axial load (dynamic) 45 N 27 Max. force for press fits (static) (static, shaft supported) 1000 N 28 Max. radial load, 5 mm from flange 14 N	n [rpm] 	<ul style="list-style-type: none"> Continuous operation In observation of above listed thermal resistance (lines 17 and 18) the maximum permissible winding temperature will be reached during continuous operation at 25°C ambient. = Thermal limit. Short term operation The motor may be briefly overloaded (recurring). Assigned power rating

Other specifications	maxon Modular System	Details on catalog page 46
29 Number of pole pairs 4		
30 Number of phases 3		
31 Weight of motor 57 g		

Connection	with Hall sensors	sensorless
Pin 1	V _{Hall} 3.5...24 VDC	Motor winding 1
Pin 2	Hall sensor 3	Motor winding 2
Pin 3	Hall sensor 1	Motor winding 3
Pin 4	Hall sensor 2	neutral point
Pin 5	GND	
Pin 6	Motor winding 3	
Pin 7	Motor winding 2	
Pin 8	Motor winding 1	

Adapter	Part number	Part number
see p. 529	220300	220310

Connector	Part number	Part number
TE	1-84953-1	84953-4
Molex	52207-1133	52207-0433

Pin for design with Hall sensors:
 FPC, 11-pol, Pitch 1.0 mm, top contact style
 Wiring diagram for Hall sensors see p. 59

¹Calculation does not include saturation effect (p. 71/178)

Planetary Gearhead
 $\varnothing 32$ mm
 0.75-6 Nm
 Page 394/398

Spur Gearhead
 $\varnothing 38$ mm
 0.1-0.6 Nm
 Page 404

Recommended Electronics:
Notes Page 46

ESCON Module 24/2	500
ESCON 36/3 EC	501
ESCON Mod. 50/4 EC-S	501
ESCON Module 50/5	501
ESCON 50/5	503
DEC Module 24/2	505
DEC Module 50/5	505
EPOS4 Micro 24/5	509
EPOS4 Mod./Comp. 24/1.5	510
EPOS4 Mod./Comp. 50/5	510
EPOS4 Comp. 24/5 3-axes	511
EPOS4 50/5	515