


# EC 6 Ø6 mm, brushless, 1.5 Watt

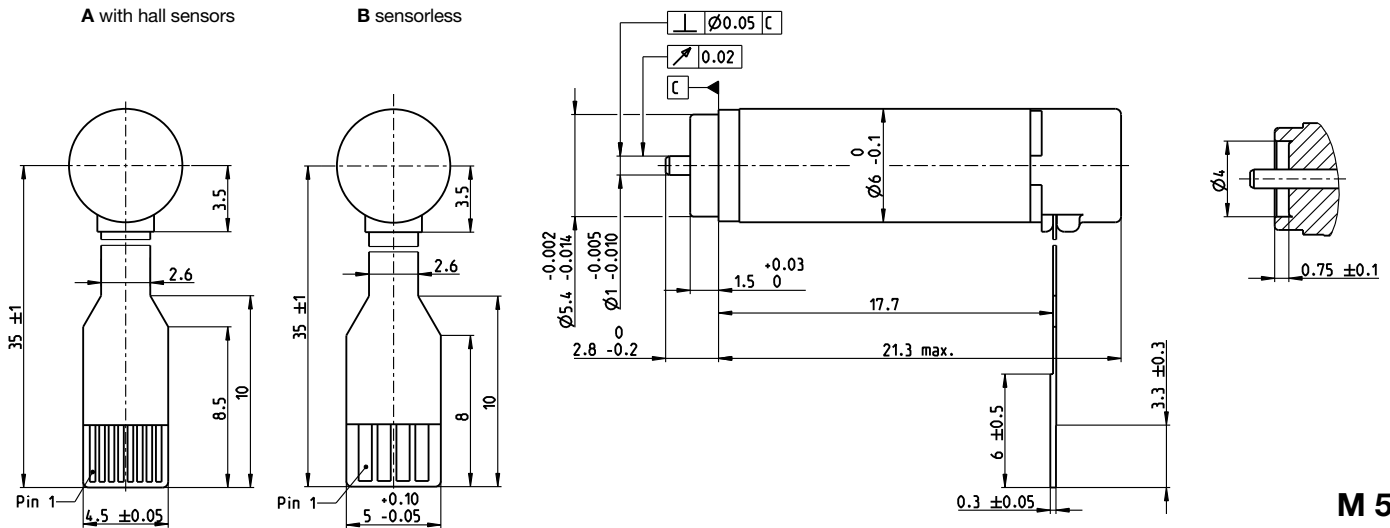

M 5:2

- Stock program
- Standard program
- Special program (on request)

### Part Numbers

	455020	468897
A with Hall sensors		
B sensorless	455019	468896

### Motor Data (provisional)

Values at nominal voltage			
1 Nominal voltage	V	6	12
2 No load speed	rpm	44200	33300
3 No load current	mA	46.5	16.2
4 Nominal speed	rpm	25500	13900
5 Nominal torque (max. continuous torque)	mNm	0.334	0.322
6 Nominal current (max. continuous current)	A	0.314	0.116
7 Stall torque	mNm	0.832	0.59
8 Stall current	A	0.688	0.188
9 Max. efficiency	%	56	50
<b>Characteristics</b>			
10 Terminal resistance phase to phase	Ω	8.72	63.8
11 Terminal inductance phase to phase	mH	0.0652	0.436
12 Torque constant	mNm/A	1.21	3.14
13 Speed constant	rpm/V	7900	3040
14 Speed/torque gradient	rpm/mNm	57000	61800
15 Mechanical time constant	ms	4.2	4.55
16 Rotor inertia	gcm <sup>2</sup>	0.00703	0.00703

### Specifications

Thermal data	
17 Thermal resistance housing-ambient	67.1 K/W
18 Thermal resistance winding-housing	16.8 K/W
19 Thermal time constant winding	1.57 s
20 Thermal time constant motor	71.8 s
21 Ambient temperature	-20...+100°C
22 Max. winding temperature	+125°C

Mechanical data (preloaded ball bearings)	
23 Max. speed	100000 rpm
24 Axial play at axial load < 0.15 N	0 mm
24 Axial play at axial load > 0.15 N	max. 0.06 mm
25 Radial play	preloaded
26 Max. axial load (dynamic)	0.1 N
27 Max. force for press fits (static)	10 N
28 Max. radial load, 2 mm from flange	2 N

### Other specifications


29 Number of pole pairs	1
30 Number of phases	3
31 Weight of motor	3 g

Values listed in the table are nominal.

Connection	with hall sensors	sensorless
Pin 1	Motor winding 1	Motor winding 1
Pin 2	Motor winding 2	Motor winding 2
Pin 3	Motor winding 3	Motor winding 3
Pin 4	V <sub>Hall</sub> 3.8...24 VDC	N.C.
Pin 5	GND	
Pin 6	Hall sensor 1	
Pin 7	Hall sensor 2	
Pin 8	Hall sensor 3	
Connector	Part number	Part number
Molex	52745-0897	52207-0460
FCI	SFV8R-2STBE1HLF	SFW4R-2STGE1LF

Pin for design with Hall sensors:  
FPC, 8 pole, pitch 0.5 mm, top contact style  
Wiring diagram for Hall sensors see page 41

### Operating Range

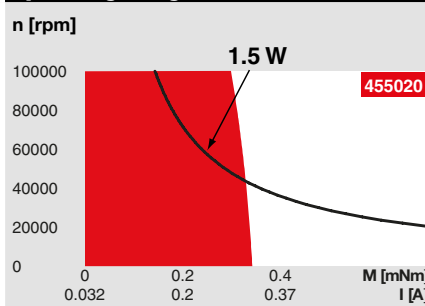


### Comments

- Continuous operation**  
In observation of above listed thermal resistance (lines 17 and 18) the maximum permissible winding temperature will be reached during continuous operation at 25°C ambient. = Thermal limit.
- Short term operation**  
The motor may be briefly overloaded (recurring).
- Assigned power rating**

### maxon Modular System

- 1 **Planetary Gearhead**  
Ø6 mm  
0.002 - 0.03 Nm  
Page 317
- Screw Drive**  
Ø6 mm  
Page 365-366

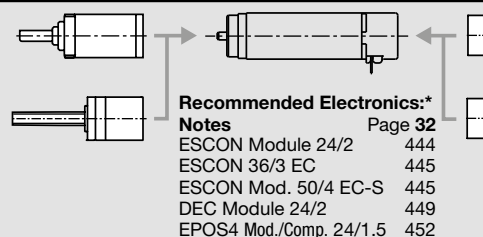

- Recommended Electronics\*  
Notes**
- ESCON Module 24/2 444
- ESCON 36/3 EC 445
- ESCON Mod. 50/4 EC-S 445
- DEC Module 24/2 449
- EPOS4 Mod./Comp. 24/1.5 452

\*Not in combination with encoder 6 OPT. Adapter acc. to Overview on page 35.

Overview on page 28-36

- Encoder 6 MAG**  
64-256 CPT,  
Page 405
- For motor type B:  
Encoder 6 OPT**  
128 CPT,  
Page 421