
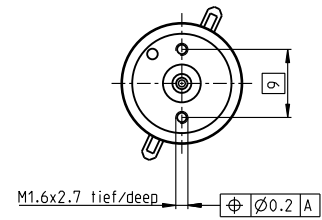
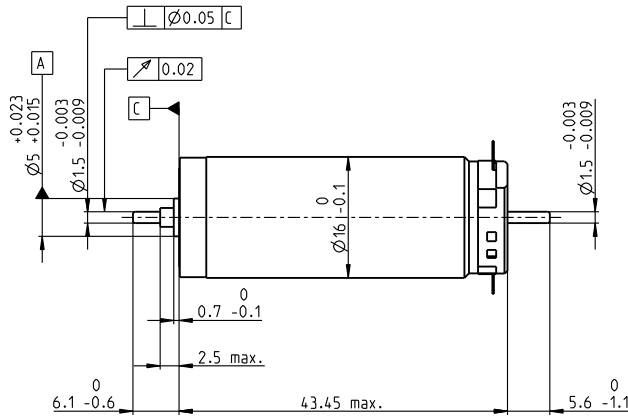


# RE 16 Ø16 mm, Graphite Brushes, 4.5 Watt

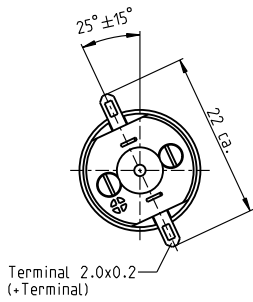

M 1:1

- Stock program
- Standard program
- Special program (on request)

## Part Numbers

118725 118726 118727 118728 118729 118730 118731 118732 **118733** 118734 118735 118736 118737 118738 118739


Motor Data		118725	118726	118727	118728	118729	118730	118731	118732	<b>118733</b>	118734	118735	118736	118737	118738	118739	
<b>Values at nominal voltage</b>																	
1 Nominal voltage	V	4.8	4.8	6	7.2	9	12	15	18	24	30	36	45	48	48	48	
2 No load speed	rpm	12700	12100	13200	13600	13100	13900	14000	13200	14000	14700	14100	14500	14200	10100	5320	
3 No load current	mA	105	98.7	87.6	75.4	56.9	45.9	37.1	28.5	23	19.6	15.6	12.8	11.8	7.66	3.63	
4 Nominal speed	rpm	11200	10500	11500	11700	11000	11900	12200	11300	12200	12900	12300	12700	12400	8130	3170	
5 Nominal torque (max. continuous torque)	mNm	2.15	2.27	2.67	3.18	4.09	4.36	4.34	4.48	4.5	4.37	4.44	4.41	4.43	4.65	4.77	
6 Nominal current (max. continuous current)	A	0.72	0.72	0.72	0.72	0.69	0.582	0.467	0.375	0.299	0.245	0.199	0.162	0.15	0.111	0.0603	
7 Stall torque	mNm	26.3	22.7	25.8	27.4	29.9	34.3	35.3	33.4	36.3	36.8	35.6	36.2	35.4	24.2	12.1	
8 Stall current	A	7.56	6.26	6.16	5.58	4.65	4.23	3.51	2.6	2.24	1.91	1.48	1.23	1.11	0.541	0.144	
9 Max. efficiency	%	69	69	72	73	76	79	79	79	80	80	80	81	81	78	71	
<b>Characteristics</b>																	
10 Terminal resistance	Ω	0.635	0.767	0.975	1.29	1.94	2.83	4.28	6.93	10.7	15.7	24.4	36.5	43.3	88.7	334	
11 Terminal inductance	mH	0.021	0.023	0.03	0.042	0.071	0.113	0.174	0.285	0.452	0.64	0.994	1.48	1.74	3.44	12.1	
12 Torque constant	mNm/A	3.48	3.64	4.2	4.91	6.43	8.11	10.1	12.9	16.2	19.3	24.1	29.4	31.9	44.8	83.9	
13 Speed constant	rpm/V	2750	2630	2280	1940	1480	1180	948	742	589	495	397	325	299	213	114	
14 Speed / torque gradient	rpm/mNm	502	554	529	511	447	411	403	399	389	403	402	404	407	423	453	
15 Mechanical time constant	ms	9.07	8.35	7.36	6.71	6.13	5.78	5.56	5.43	5.31	5.28	5.25	5.23	5.22	5.24	5.28	
16 Rotor inertia	gcm <sup>2</sup>	1.73	1.44	1.33	1.26	1.31	1.34	1.32	1.3	1.3	1.25	1.25	1.24	1.23	1.18	1.11	

## Specifications

- Thermal data**
- 17 Thermal resistance housing-ambient 30 K/W
  - 18 Thermal resistance winding-housing 8.5 K/W
  - 19 Thermal time constant winding 10.6 s
  - 20 Thermal time constant motor 459 s
  - 21 Ambient temperature -20...+65°C
  - 22 Max. winding temperature +85°C
- Mechanical data (sleeve bearings)**
- 23 Max. speed 16000 rpm
  - 24 Axial play 0.05 - 0.15 mm
  - 25 Radial play 0.014 mm
  - 26 Max. axial load (dynamic) 0.8 N
  - 27 Max. force for press fits (static) 15 N
  - (static, shaft supported) 60 N
  - 28 Max. radial load, 5 mm from flange 1.5 N
- Other specifications**
- 29 Number of pole pairs 1
  - 30 Number of commutator segments 7
  - 31 Weight of motor 40 g

Values listed in the table are nominal.  
Explanation of the figures on page 151.

## Operating Range

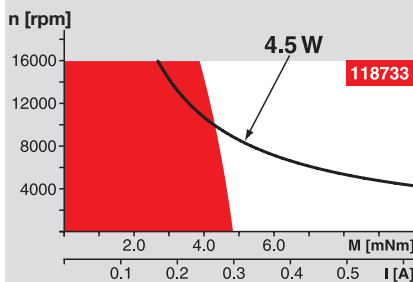


## Comments

- Continuous operation**  
In observation of above listed thermal resistance (lines 17 and 18) the maximum permissible winding temperature will be reached during continuous operation at 25°C ambient.  
= Thermal limit.
- Short term operation**  
The motor may be briefly overloaded (recurring).
- Assigned power rating**

## maxon Modular System

- Planetary Gearhead**  
Ø16 mm  
0.1 - 0.3 Nm  
Page 323
- Planetary Gearhead**  
Ø16 mm  
0.2 - 0.6 Nm  
Page 324
- Spindle Drive**  
Ø16 mm  
Page 365-367

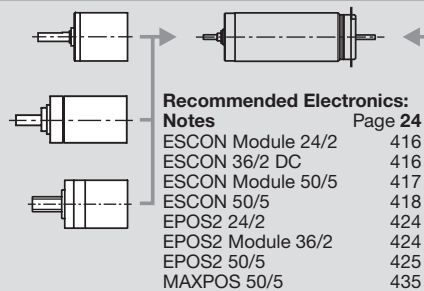

## Overview on page 20-27

- Encoder MR**  
32 CPT,  
2 / 3 channels  
Page 388
- Encoder MR**  
128 / 256 / 512 CPT,  
2 / 3 channels  
Page 390
- Encoder MEnc**  
Ø13 mm  
16 CPT, 2 channels  
Page 409