

# TopCon TC.GSS.32.600.4WR.S

Programmable Grid-tie Source – Sink  
Bidirectional High-Power DC Supply



TopCon GSS Power Supply unit with optional front panel control unit HMI

- TopCon Grid-tie Source Sink technology enables full bidirectional operation
- Compact design with integrated EMI - and Sine filters
- Constant voltage (0 – 100 %), constant current (0 – 100 %) and constant power operation (5 – 100%) with automatic and fast crossover and mode indication. Internal resistance simulation.
- Graduated product line: 65 V<sub>DC</sub>, 130 V<sub>DC</sub>, 400 V<sub>DC</sub>, 500 V<sub>DC</sub>, 600 V<sub>DC</sub>, higher voltages with series connection up to 1500 V<sub>DC</sub>. Power categories of 20 kW and 32 kW are available for each nominal output voltage.
- Optional extras and accessories complete the product line of power supply units.
- Modular concept for easy power increase: Parallel, series, matrix or multiloading master-slave-operation.
- High efficiency at a low cost, resulting from the application of innovative IGBT and transformer technology. Primary switched. Galvanic isolated. Full digital control and regulation.
- A user-friendly PC program, the operating and service software TopControl, enables the user to communicate with the power supply.
- TopControl installation file, LabVIEW® and C/C++ C#/ .NET API (DLL file) are included in the scope of delivery.
- CE conformity
- Swiss made: Developed, manufactured and tested

**Regatron AG**  
Kirchstrasse 11  
CH-9400 Rorschach  
Switzerland

Tel +41 71 846 67 67  
Fax +41 71 846 67 77  
www.regatron.com  
topcon@regatron.ch

# 32 kW / 600 VDC / 66 A

## Mains requirements and output specifications

### AC lineside ratings

Line voltage / Line current relationship

.....	3 x 380 V <sub>AC</sub> ± 10 % / 54 Arms <sup>1) 3)</sup>
.....	3 x 400 V <sub>AC</sub> ± 10 % / 51 Arms <sup>1)</sup>
.....	3 x 415 V <sub>AC</sub> ± 10 % / 49 Arms <sup>1)</sup>
.....	3 x 440 V <sub>AC</sub> ± 10 % / 47 Arms <sup>1)</sup>
.....	3 x 460 V <sub>AC</sub> ± 10 % / 45 Arms <sup>1)</sup>
.....	3 x 480 V <sub>AC</sub> ± 10 % / 43 Arms <sup>1)</sup>

Line frequency ..... 48 – 62 Hz  
Mains connection type ..... 3L+PE (no neutral)  
Protective conductor current @ 50 Hz ..... < 20 mA<sup>2)</sup>  
Touch current unweighted ..... < 20 mA<sup>2)</sup>  
Touch current weighted ..... < 2 mA<sup>2)</sup>  
Powerfactor Q1/ Q4-mode ..... ≥ 0.99 (At nominal power)

### DC loadside ratings

Power range .....	0 kW – +/- 32 kW <sup>3)</sup>
Voltage range .....	0 VDC – 600 VDC
Current range .....	0 A – +/- 66 A <sup>3)</sup>
Internal resistance range .....	0 mΩ – 9100 mΩ <sup>4)</sup>
Switchable output capacitance .....	0.09 mF/ 0.9 mF

### Operating modes

Q1 mode.....	source mode
Q4 mode.....	regenerative/ sink mode
Voltage regulation (CV) .....	0 – 100 % U <sub>max</sub>
Current regulation (CC) .....	0 - ± 100 % I <sub>max</sub>
Power regulation (CP) .....	0 - ± 100 % P <sub>max</sub>

### Static accuracy

Load regulation CV, CC.....	< ± 0.1 % FS <sup>5)</sup>
Line regulation CV, CC.....	< ± 0.1 % FS <sup>6)</sup>

### Transient response time

Load regulation CV.....	< 1.5 ms <sup>7)</sup>
Set value tracking CV .....	< 1.5 ms <sup>8) 11)</sup>
Set value tracking CC:	
-With quadrant change .....	< 3 ms <sup>8)</sup>
-Without quadrant change .....	< 2 ms <sup>8)</sup>

### Stability

CV, CC .....	< ± 0.05 % FS <sup>9)</sup>
--------------	-----------------------------

### Temperature coefficient

CV .....	< 0.02 % FS / °C <sup>10)</sup>
CC .....	< 0.03 % FS / °C <sup>10)</sup>

### DC-side ripple Q1 / Q4 Mode

≤ 300 Hz V <sub>pp</sub> .....	< 0.5 % FS <sup>11)</sup>
≤ 300 Hz V <sub>rms</sub> .....	< 0.1 % FS <sup>11)</sup>

### DC-side noise Q1 / Q4 Mode

40 kHz – 1 MHz V <sub>pp</sub> .....	< 1 V <sup>11)</sup>
40 kHz – 1 MHz V <sub>rms</sub> .....	< 0.2 V <sup>11)</sup>

### Remote sensing

Terminals on rear side.....	Load voltage drop compensation
-----------------------------	--------------------------------


- 1) At nominal output power and nominal line voltage. Soft-start to limit turn-on surge currents.
- 2) According to IEC60990: Protective conductor current: 50 Hz component @400 VAC/50Hz/P<sub>nom</sub>  
For weighted touch current: Measured for perception/reaction  
Protection with earth leakage circuit breaker possible. An additional PE connection is necessary.
- 3) Current according to the given power limit of the corresponding units. (P = V<sub>Load</sub> \* I<sub>Load</sub> ≤ 32 kW; for I<sub>Load</sub> > 53 A --> V<sub>Load</sub> < 600 V).  
Information about derating can be found on page 2.
- 4) The maximum value of the internal resistance is automatically calculated via the DC nominal values  
(Ri [mΩ] = V<sub>Load</sub> / I<sub>Load</sub> = 600 VDC / 66 A) or limited by the maximum Ri-value: 32000 [mΩ].
- 5) Typical value for 0 – 100 % load variation, at constant line input and temperature conditions.
- 6) Typical value for input voltage variation within 380 VAC ± 10 % – 480 VAC ± 10 %, at constant load and temperature conditions.
- 7) Typical recovery time to within < ± 5 % band of set value for a load step 10 – 90 %, ohmic load, at constant line input and temperature conditions. Transient response time can be slightly affected by multi-unit operation.
- 8) Rise/ fall time for 10%-90% of a set step.
- 9) Maximum drift over 8 hours after 30 minute warm-up time, at constant line input, load and temperature conditions.
- 10) Typical change of output values versus ambient temperature, at constant line input and load conditions.
- 11) Typical value at nominal ohmic load, line asymmetry < 1 V<sub>rms</sub>.

Non-ohmic loads can lead to deviations in the technical data. All product specifications are subject to change without notification.

**General specifications**

Efficiency at nominal power Q1/Q4 .....91 %/ 91.5 %<sup>1)</sup>  
 Weight ..... 97 kg  
 Width front panel ..... 483 mm  
 Width housing..... (19") 444 mm  
 Height front panel ..... 399 mm  
 Height housing..... (9U) 394 mm  
 Depth with output terminals ..... 634 mm  
 Depth housing ..... 594 mm  
 Input connections: ..... terminal block 4 x 25 mm<sup>2</sup>  
 DC terminals: .....nickel-plated copper bars,  
 length: 40 mm, 1 hole 9 mm Ø in each bar  
 Operating orientation ..... upside  
 Storage, transport orientation ..... upside

**Operating range**

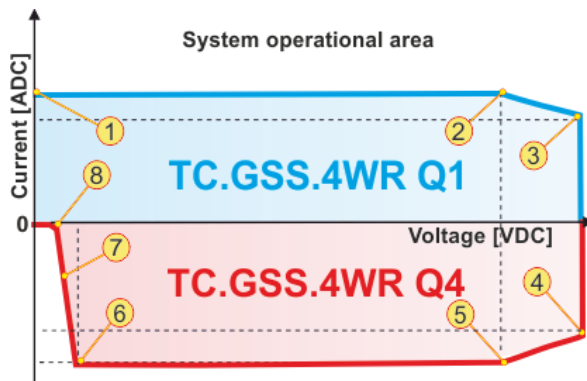

Q1 and Q4 range of device TC.GSS.32.600.4WR.S.

-1- : .....0 V / 66 A	-4- : ..... 600 V / -53.3 A
-2- : .....484.8 V / 66 A	-5- : ..... 484.8 V / - 66 A
-3- : .....600 V / 53.3 A	-6- : ..... 50 V / -66 A
.....	-7- : ..... 40 V / -33 A
.....	-8- : ..... 30 V / 0 A

**Derating**

**Current derating**

No current derating.

**Power derating**

Linear power derating < 360 VAC in Q1 mode operation to 30.2 kW / 340 VAC.

**Option airfilter derating**

In case a possible derating temperature should occur, it will be reduced by 3°C.

**Isolation**

Line to case/logic..... 1670 VDC 1 s  
 Output to case/logic.....2540 VDC 1 s  
 Transformer .....4800 VAC  
 Output to case ..... > 10 MΩ  
 per DC bar..... 13.6 nF  
 - bar<sup>2)</sup>.....+1000 VDC / -1000 VDC  
 + bar<sup>2)</sup>.....+1000 VDC / -1000 VDC

**Protection**

**Built-in protection**

Overvoltage protection  
 (programmable) ..... 0 – 110 % U<sub>max</sub>  
 Overcurrent protection  
 (programmable) .....0 – 110 % I<sub>max</sub>  
 Max. reactive load voltage.....≤ 110 % U<sub>max</sub>  
 Reverse Polarity Protection RPP .....optional  
 Short circuit protection..... Cont. short circuit allowed  
 Islandig, grid off, requirements for the connection of  
 micro-generators in public grid according  
 VDE 0126/EN 50438.

**Internal diagnostics**

line input conditions, transformer primary current, temperature conditions, processor idle time, system configuration, system communication, sensor signals, power semiconductor temperatures.

**Type of protection (according EN 60529)**

Basic construction .....IP 20 (current bars on rear side excluded)  
 Mounted in cabinet ..... Up to IP 54

**Conformity CE-Marking**

**EMC Directive**

EMC emission ..... EN 61000-6-4  
 EMC immunity ..... EN 61000-6-2

**Low Voltage Directive**

Electronic equipment  
 for use in power installations ..... EN 50178

**Ambient conditions**

Operating temperature ..... 5 – 40 °C  
 Storage temperature..... -18 – 70 °C  
 Relative air humidity (non-condensing) ..... 0 – 95 %

**Cooling**

**Standard:** Internal liquid cooling with completely integrated liquid to air heat-exchange system using temperature-controlled fans.

**Optional:** Integrated liquid cooling system of the power stage with completely integrated liquid to liquid heat-exchange system.

**Heat exchanger**

Material<sup>3)</sup> ..... Stainless steel  
 Inlet/outlet on rear side size: ..... G 1/2"  
 Liquid temperature..... 15<sup>4)</sup> – 35 °C  
 Flow..... ≥ 3 l/min  
 Pressure max. .... 10 bar  
 Pressure drop.....50 mbar@3 l/min

1) At 15 kHz switching frequency line side inverter.  
 2) Maximum working voltage including DC-Output Voltage.  
 3) Ni brazed, ready to use with deionized water.  
 4) 20 °C ambient temperature and ≤ 70 % relative air humidity.

**Standard programming interfaces**

**Control port**

Isolation to electronics and earth: 125 Vrms  
25 pin D-sub connector, female, on rear panel

**Control port input functions**

Output voltage off / on ..... 0 / 24 VAC / DC  
2 digital application inputs ..... 0 / 24 VAC / DC <sup>1)</sup>  
Interlock circuit..... 0 / 24 VDC  
Voltage setting 0 – 100 % ..... 0 V – 10 V  
Current setting -100% – 100 % ..... -10 V – 10 V  
Power setting 0 – 100 % ..... +10 V – 0 V <sup>4)</sup>  
Int. resistance setting 0% – 100% ..... 0 V – 10 V

**Control port output functions**

Unit ready / error ..... Relay contact  
Output voltage on ..... Relay contact  
Warnings ..... Relay contact  
Actual voltage readback 0 – 100 % ..... 0 V – 10 V  
Actual current readback -100 % – 100 %  
..... -10 V – 10 V  
Resolution (programming and readback):  
U, I, P, Ri ..... 0.2 % FS

**RS232**

9 pin D-sub connector, female, on front panel  
Isolation to electronics and earth ..... 125 Vrms  
Baud rate ..... 38400 baud  
Resolution (programming and readback):  
U, I ..... 0.025 % FS  
P, Ri ..... 0.1 % FS

**Ordering Information**

**Ordering code**

TC.GSS.32.600.4WR.S(.Option)

**Standard Scope of delivery**

TopCon power supply unit ready to install, including:  
..... Operating manual (English or German)  
..... RS232 cable 1.8 m  
..... Installation disc TopControl,  
..... LabVIEW<sup>®</sup> and C/C++; C#/ .NET API (DLL file)

**Options**

**Front panel control unit HMI**

Integrated control, programming and display unit with graphic LC-Display, select wheel, push buttons and interactive text menus  
Languages (switchable) ..... English, German  
Display resolution:  
U ..... 4 digits  
I ..... 3 digits  
P ..... Kilowatt + 1 decimal digit  
Ri ..... 1 mΩ

**Remote control unit RCU**

Specifications same as HMI, available in 2 versions:  
..... desk top and 19" rackmount  
max. cable length ..... 40 m  
Desk top W x H x D ..... 355 x 100 x 290 mm  
19" rackmount W x H x D ..... 483 x 88 (2 U) x 290 mm

**Further options**

TFEAAP <sup>1)</sup> ..... Function Generating Engine  
Time-based and parametric programming  
SASControl <sup>1)</sup> ..... SAS application program including TFEAAP  
BatControl <sup>1)</sup> ..... Battery application program  
BatSim <sup>1)</sup> ..... Battery simulation program  
CapSim <sup>1)</sup> ..... Capacitor simulation program  
RS232REAR <sup>2)</sup> ..... RS-232 on front and rear panel  
USB <sup>3)</sup> ..... USB on rear panel  
RS422 <sup>2)</sup> ..... RS-422 on rear panel  
ETHERNET <sup>3)</sup> ..... Ethernet on rear panel  
IEEE <sup>3)</sup> ..... GPIB/ IEEE488.2/ SCPI on rear panel  
... cannot be combined with CANOPEN nor with USB  
CANOPEN <sup>3)</sup> ..... CAN/ CANOPEN on rear panel  
CANmp ..... CANmp on rear panel  
OptoLink <sup>3)</sup> ..... OptoLink on rear panel  
CANCABLE ..... Connecting cable  
..... for Multi-Unit Operation or RCU: 2, 5, 10 m  
PACOB ..... Protection against accidental contact  
LCAL ..... Integrated liquid cooling of the power stage, inlet / outlet on rear side, size G 1/2"  
AIRFILTER<sup>5)</sup> ..... Front panel airfilter 9 U  
ISR ..... 2 channel Integrated Safety Relay  
NSOV ..... Non-Standard output voltage (if possible)

1) Customer-specifically programmable.  
2) This option and RS232: time-shared mode required, if used together.  
3) RS232 only on Rear Panel.  
4) Bipolar power settings -10 V... +10 V possible with software configuration change  
5) Information about derating can be found on page 2.