





Features

- · Constant Power mode output
- · Metal housing design with functional Ground
- Built-in active PFC function
- · Class 2 power unit
- No load / Standby power consumption < 0.5W
- IP67 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer 3 in 1 dimming (dim-to-off)
- Typical lifetime>50000 hours
- 5 years warranty


Applications

- · LED street lighting
- LED architectural lighting
- LED bay lighting
- · LED floodlighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

Description

XLG-25 series is a 25W AC/DC LED driver featuring the constant power mode output. XLG-25 operates from $100 \sim 305$ VAC. Thanks to the high efficiency up to 88%, The entire series is able to operate between $-40 \,^{\circ}\mathrm{C} \sim 85 \,^{\circ}\mathrm{C}$ wide case temperature range with air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications. XLG-25 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

■ Model Encoding

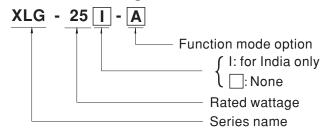

Type	IP Level	Function	Note
Α	IP67	Io adjustable through built in potentiometer.	In Stock
AB	IP67	Io adjustable through built in potentiometer 3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock



25W Constant Power Mode LED Driver


SPECIFICATION

1			
22 ~54V			
90VAC ~ 305VAC 25W			
0.25 ~ 1.05A			
47 ~ 63Hz			
Tcase=-40 ~ +85°C (Please refer to " OUTPUT LOAD vs TEMPERATURE" section) Tcase=+85°C			
20 ~ 95% RH non-condensing			
-40 ~ +80°C			
±0.03%/°C (0~60°C)			
pendent, EN62384;			
e-Line 4KV)			
J Line intry			
 All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. Please refer to "DRIVING METHODS OF LED MODULE". 			
3. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.			
4. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.			
5. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the			
complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 6. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (tc) point (or TMP, per DLC), is about 70°C or less.			
7. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com 8. Only for XLG-25 I series			
9. The ambient temperature derating of 3.5° C/1000m with fanless models and of 5° C/1000m with fan models for operating altitude higher than 2000m(6500ft). 10. Only for XLG-25-A			
11. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf			
fe			




■ Block Diagram

PFC fosc: 50~120KHz PWM fosc: 60~130KHz

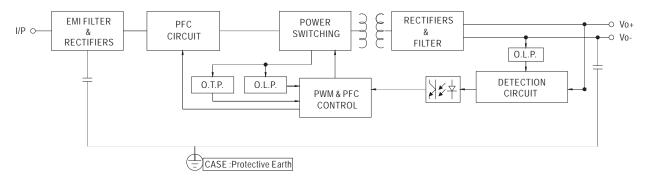

■ DRIVING METHODS OF LED MODULE

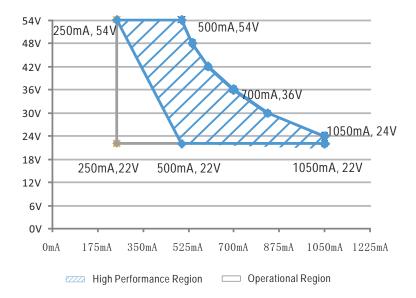




■ DIMMING OPERATION




※ 3 in 1 dimming function (for AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)

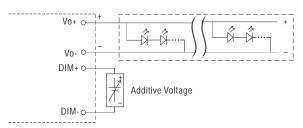


"DO NOT connect "DIM- to Vo-"

Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

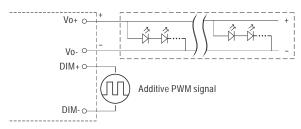



"DO NOT connect "DIM- to Vo-"


O Applying additive resistance:

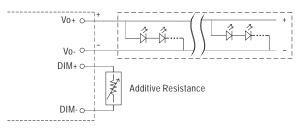

"DO NOT connect "DIM- to Vo-"









Note : 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.

2. The output current could drop down to 0% when dimming input is about $0k\Omega$ or 0Vdc, or 10V PWM signal with 0% duty cycle.




■ OUTPUT LOAD vs TEMPERATURE

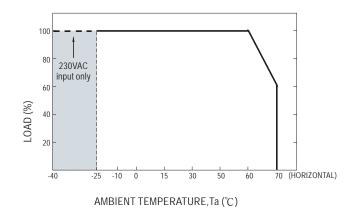

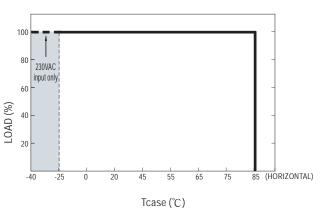


■ STATIC CHARACTERISTIC

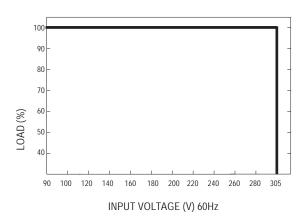


 $\ensuremath{\mbox{\%}}\mbox{ De-rating is needed under low input voltage}.$

■ POWER FACTOR (PF) CHARACTERISTIC

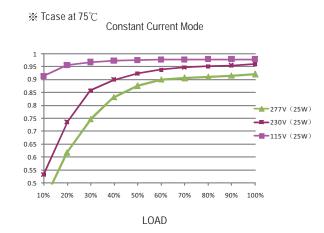


■ TOTAL HARMONIC DISTORTION (THD)

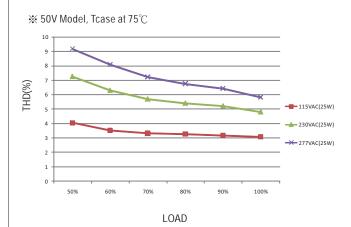

■ EFFICIENCY vs LOAD


 $\rm XLG\text{-}25$ series possess superior working efficiency that up to 88% can be reached in field applications.

% 50V Model, Tcase at 75 ℃

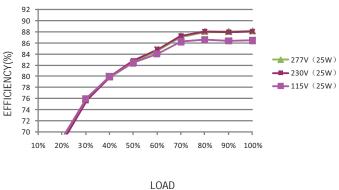



■ LIFE TIME

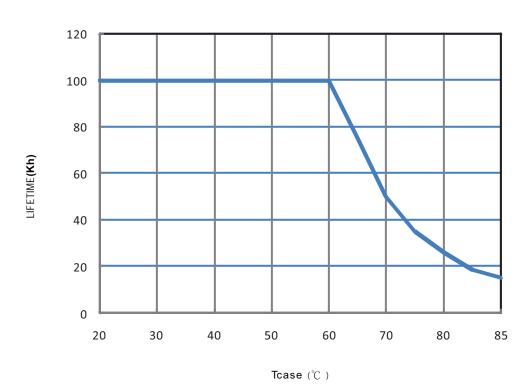





■ Mechanical Specification CASE NO.: 268A Unit:mm **※** A-Type 105 300±10 300±10 90 | | |-63 40 AC/N(Blue) AC/L(Brown) PE (Green/Yellow) Vo-(Black) Vo+(Red) (tc SJOW 17AWGx3C SJOW 17AWGx2C &H05RN-F 3x1.0mm² &05RN-F 2x1.0mm² • (tc) : Max. Case Temperature 30 25.8



※ AB-Type

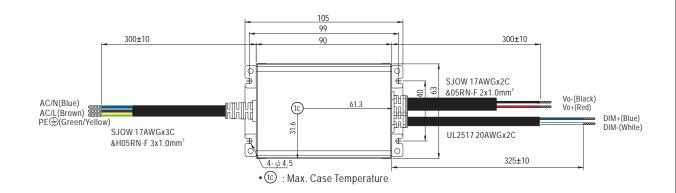

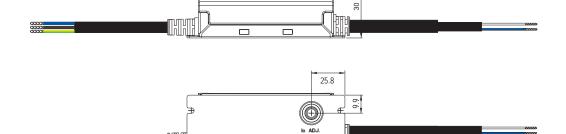

■ Installation Manual

Please refer to: http://www.meanwell.com/manual.html